

CountDown²

CountDown² is the ideal product for those events that are tightly scheduled. CountDown² works by displaying time on numeric displays. The timer can be set to a specific duration, i.e. '20.00' minutes and the system simply counts down to '00.00'. To remind the presenter to summarise and conclude, the separator between the minutes and seconds changes from Green, to Yellow and Red on the 25mm (1") display. Alternatively a 75mm (3") tri-colour display option is available for long distance viewing.

An Intelligent lamp option can also be used to only show the colour change.


The Countdown² system can also be set to display the required speaking time or display actual time of day (RTC). Either 1 or 2 remote displays can be used or a combination of displays and optional intelligent lamps, therefore providing for more than one lectern.

The Countdown² displays can be set up and operated over distances of at least 100 metres (300ft).

Main Features

- Counts up and down
- Real Time Clock (RTC) display option also
- Dual outputs for more than one lectern
- Uses standard 3 pin XLR (mic) cables
- Editable while counting
- Big (75mm) tri-colour display option
- Intelligent lamp option for coloured signals only
- Worldwide power supplies

3 Year Limited Factory Warranty

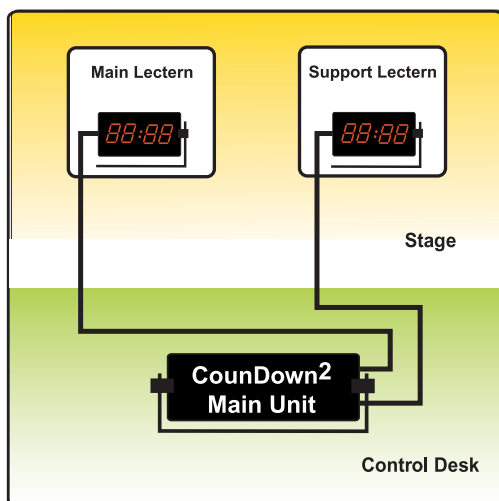

Professional Presenter Timekeeping



Interspace Industries

28 High Street, Arlesey, Bedfordshire, SG15 6RA, UK
call: +44 (0) 870 770 8088, Fax: +44 (0) 870 770 8089
email: moreinfo@interspaceind.com web: www.interspaceind.com





Specifications

Signals:

2 outputs each carrying 12VDC 100mA (limiting)
Data +/-10Vp-p

Connectors:

2 x Male XLR

Accessories included:

1 Remote Display

Available Options:

25mm (1") or 75mm (3")
or Intelligent Lamp Remote Displays

Required user parts:

XLR cable

Dimensions and weights mm (inch):

Main Unit

DxWxH: 55 (2") x 280 (11") x 90 (3 1/2")
Weight: 1190g (42oz)

Remote Display 25mm (1"):

DxWxH: 50 (2") x 157 (6") x 90 (3 1/2");
Weight: 737g (26oz)

Power:

International Power Supply 100-240VAC 1.0A max
47-63Hz. IEC connector.

Available Options



Intelligent Lamp Option

A small high brightness indicator to allow the presenter to see colour changes only. Discrete yet effective lamp which changes colour from green through amber to red as time elapses.

Dimensions and weights mm (inch):

LxWxD: 71(2 8/10") x 64(2 1/2") x 40(1 6/10") 218g (8oz)

Big Display Option

For those producers or presenters who need a larger display, or to use the countdown from a distance, the Big Display is just what you need. All digits on the 75mm (3") Big Display change from green through amber to red as time elapses, which provides the presenter with clear timing information from a distance. The integrated bracket allows for angle adjustment and positioning.

Dimensions and weights mm (inch):

HxWxD = 150(5 3/4") x 330(13") x 50(2")
Weight = 1Kg / 2.2lbs

Connections:

XLR Female



Universal Stand

Handy desktop stand designed for use with Intelligent lamp.
Connects directly to 3pin XLR (mic) cable.